

ACROTILE - G

Joint Filling Cementitious Tile Grout
(White & Colors)



DESCRIPTION

ACROTILE-G is a single component joint filling compound based on cement, polymer and speciality chemicals.

USES

ACROTILE-G can be used for joint grouting of ceramic, mosaic, marble, granite, resin bonded marble, natural stones, terrazzo tiles and swimming pool tiling.

METHOD OF USE

- Surface to be grouting must be sound, clean, dry and free from other contaminants before application
- Ensure that the groove to be filled is free from dust and other contaminants like oil, grease etc. It is user's responsibility to checked surface soundness properly and to satisfy himself that the actual surface conditions of use are suitable.
- Ensure that the groove is not frilled with standing water.
- Surface of grouting should be allowed to cure properly.
- Mix 3 to 3.5 Kg. of Powder with 1 Kg. of water to a smooth blend of creamy consistency and leave for 5-10 minutes.
- Remix the composite.
- Apply mixed paste by means of a spatula/trowel.

- Clean the excess material by means of a soft sponge/cloth and water about 5-10 minutes of applications.

PROPERTIES

Form	White coloured powder
Mixed paste	White
Fresh wet density	2100 Kg / m ³
Pot Life	90 minutes at 30°C
Chloride Content	Nil
Setting Time	Similar to paint cement sand mortar
Hardening Time	24 hrs
Shelf Life	12 months, in sealed condition
Storage	Store in dry and cool place and away from direct sunlight.
Coverage	1 Kg. ACROTILE-G may cover approx. 70 sq. ft. (3 mm width) based on 8" x 6" tiles.

ADVANTAGES

- Pre-measured quantity ensures total quality.
- Highly resistant to water permeability.
- Crack resistant due to flexible in nature.
- Excellent adhesive strength.
- Longer workable time.
- UV resistance
- Most properties improve with age.
- Non-staining
- Economical

PACKING

Available in 1 Kg and 20 Kg.

ADDITIONAL INFORMATION

Our technical service team is available for on-site assistance and advice in using our all products. A very wide range of our products like water proofers, plasticizers, super-plasticizers, accelerators, retarders, air entrainers, mould release agents, curing compounds, grouting products, anchor products, bonding agents and repair materials are available for all round solution of civil/construction problems.

WARRANT

Whilst all reasonable precaution has been considered in compiling technical data on our products, all recommendations or suggestions, regarding the use of such products are made without guarantee since the conditions of use are beyond our control. It is user's responsibility to satisfy himself that such products are fit for the purpose for which he intends to use it and that the actual conditions or use are suitable.

Acrotile-G




20 Kg



1 Kg



Other Products Categories available:

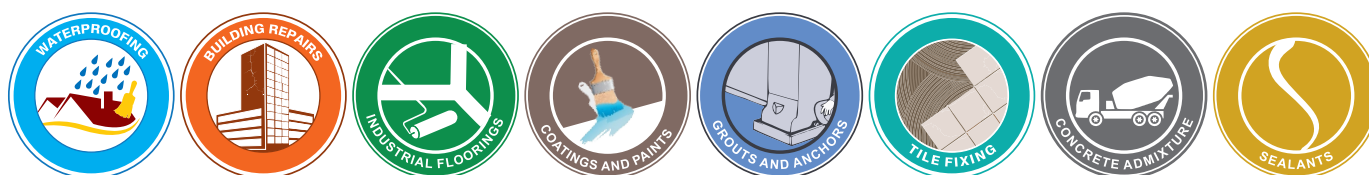

WATERPROOFING, REPAIRS, FLOORING, EXTERIOR COATINGS, WATER REPELLENT COATINGS, TILE FIXING, GROUTS, CONCRETE ADMIXTURES, ADHESIVES & SEALANTS, ETC.

For further information and terms of sale, please contact : The Technical Manager



acro paints

Acro Paints Limited



ISO 9001 : 2015
ISO 14001 : 2015
ISO 45001 : 2018 (OH & S)

Acro House, 452, Phase-5, Udyog Vihar, Gurugram, Haryana | INDIA | Tele.: 0124-4817070 (40 Lines), Toll Free : 1800-11-8880

E-mail : support@acropaints.net, Website: www.acropaints.net (CIN NO. : U24119DL1989PLC036308)